


F3-Y200N

קוטר ציר [אינץ']	מק"ט	מידות [מ"מ]											עומסים [N]		מהירות מרבית [סל"ד]	מיסב פנימי [ק"ג]
		A	B	D	E	F	G	H	L	M	S	U	סטטי	דינמי		
3/4	F3-Y212N	61.9	63.5	43.66	85.7	10	1.6	14.3	45.6	33.3	111.9	14.7	5700	9830	7500	YG212NL
7/8	F3-Y214N	68.3	69.85	44.45	95.2	10	1.6	15.1	46.0	38.1	124.6	13.9	6810	10810	6800	YG214NL
15/16	F3-Y215N	68.3	69.85	44.45	95.2	10	1.6	15.1	46.0	38.1	124.6	13.9	6810	10810	6800	YG215NL
1	F3-Y216N	68.3	69.85	44.45	95.2	10	1.6	15.1	46.0	38.1	124.6	13.9	6810	10810	6800	YG216NL
1-1/8	F3-Y218N	81.0	82.55	48.42	108.0	10	1.6	15.1	50.0	44.4	142.1	16.7	9790	15030	5600	YG218NL
1-3/16	F3-Y219N	81.0	82.55	48.42	108.0	10	1.6	15.1	50.0	44.4	142.1	16.7	9790	15030	5600	YG219NL
1-1/4	F3-Y2E20N	81.0	82.55	48.42	108.0	10	1.6	15.1	50.0	44.4	142.1	16.7	9790	15030	5600	YG2E20NL
1-1/4	F3-Y220N	92.1	92.08	51.20	117.5	12	1.6	15.9	52.8	55.6	155.6	17.5	13300	19880	4800	YG220NL
1-3/8	F3-Y222N	92.1	92.08	51.20	117.5	12	1.6	15.9	52.8	55.6	155.6	17.5	13300	19880	4800	YG222NL
1-7/16	F3-Y223N	92.1	92.08	51.20	117.5	12	1.6	15.9	52.8	55.6	155.6	17.5	13300	19880	4800	YG223NL
1-1/2	F3-Y224N	101.6	101.6	56.36	130.2	12	1.6	15.9	57.9	60.3	172.2	17.8	17200	25100	4500	YG224NL
1-5/8	F3-Y226N	108.0	104.78	56.36	136.5	12	1.6	15.9	57.9	63.5	180.2	17.5	17800	25220	4000	YG226NL
1-11/16	F3-Y227N	108.0	104.78	56.36	136.5	12	1.6	15.9	57.9	63.5	180.2	17.5	17800	25220	4000	YG227NL
1-3/4	F3-Y228N	108.0	104.78	56.36	136.5	12	1.6	15.9	57.9	63.5	180.2	17.5	17800	25220	4000	YG228NL
1-15/16	F3-Y231N	114.3	111.12	62.71	142.9	12	1.6	19.0	64.3	69.8	188.9	20.2	20200	27090	3600	YG231NL
2	F3-Y2E32N	114.3	111.12	62.71	142.9	12	1.6	19.0	64.3	69.8	188.9	20.2	20200	27090	3600	YG2E32NL
2	F3-Y232N	125.4	130.18	71.44	161.9	16	1.6	23.0	73.0	76.2	215.9	23.8	25400	33540	3200	YG232NL
2-3/16	F3-Y235N	125.4	130.18	71.44	161.9	16	1.6	23.0	73.0	76.2	215.9	23.8	25400	33540	3200	YG235NL
2-1/4	F3-Y236N	136.5	142.88	77.79	174.6	16	1.6	23.8	79.4	84.1	234.2	23.8	31300	40520	3000	YG236NL
2-3/8	F3-Y238N	136.5	142.88	77.79	174.6	16	1.6	23.8	79.4	84.1	234.2	23.8	31300	40520	3000	YG238NL
2-7/16	F3-Y239N	136.5	142.88	77.79	174.6	16	1.6	23.8	79.4	84.1	234.2	23.8	31300	40520	3000	YG239NL

מידות המיסב הפנימי בעמ' 2-22

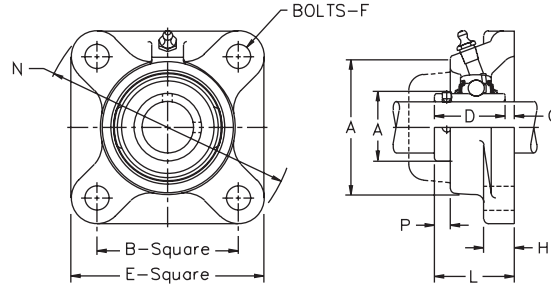

F3-U200N

קוטר ציר	מק"ט	מידות [מ"מ]										עומסים [N]		מהירות מירבית	מיסב פנימי
		A	B	D	E	F	G	H	L	N	P	Co	C		
1/2	F3-U2B08N	54.0	53.98	27.78	76.2	10	4.0	12.7	31.8	98.4	6.4	4260	8100	9000	UG2B08NL
	F3-U210N	54.0	53.98	27.78	76.2	10	4.0	12.7	31.8	98.4	6.4	4260	8100	9000	UYG210NL
	F3-U211N	54.0	53.98	27.78	76.2	10	4.0	12.7	31.8	98.4	6.4	4260	8100	9000	UYG211NL
5/8	F3-U2M17N	54.0	53.98	27.78	76.2	10	4.0	12.7	31.8	98.4	6.4	4260	8100	9000	UG2M17NL
	F3-U212N	61.9	63.5	32.54	85.7	10	5.2	14.3	37.7	111.9	7.1	5700	9830	7500	UG212NL
17	F3-U2M20N	61.9	63.5	32.54	85.7	10	5.2	14.3	37.7	111.9	7.1	5700	9830	7500	UG2M20NL
	F3-U214N	68.3	69.85	34.53	95.2	10	4.8	15.1	39.3	124.6	7.5	6810	10810	6800	UG214NL
20	F3-U215N	68.3	69.85	34.53	95.2	10	4.8	15.1	39.3	124.6	7.5	6810	10810	6800	UG215NL
	F3-U216N	68.3	69.85	34.53	95.2	10	4.8	15.1	39.3	124.6	7.5	6810	10810	6800	UG216NL
	F3-U2M25N	68.3	69.85	34.53	95.2	10	4.8	15.1	39.3	124.6	7.5	6810	10810	6800	UG2M25NL
25	F3-U218N	81.0	82.55	39.69	108.0	10	4.4	15.1	44.0	142.1	11.1	9790	15030	5600	UG218NL
	F3-U219N	81.0	82.55	39.69	108.0	10	4.4	15.1	44.0	142.1	11.1	9790	15030	5600	UG219NL
	F3-U2E20N	81.0	82.55	39.69	108.0	10	4.4	15.1	44.0	142.1	11.1	9790	15030	5600	UG2E20NL
	F3-U2M30N	81.0	82.55	39.69	108.0	10	4.4	15.1	44.0	142.1	11.1	9790	15030	5600	UG2M30NL
30	F3-U220N	92.1	92.08	44.85	117.5	12	4.0	15.9	48.8	155.6	13.1	13300	19880	4800	UG220NL
	F3-U222N	92.1	92.08	44.85	117.5	12	4.0	15.9	48.8	155.6	13.1	13300	19880	4800	UG222NL
	F3-U223N	92.1	92.08	44.85	117.5	12	4.0	15.9	48.8	155.6	13.1	13300	19880	4800	UG223NL
	F3-U2M35N	92.1	92.08	44.85	117.5	12	4.0	15.9	48.8	155.6	13.1	13300	19880	4800	UG2M35NL
35	F3-U224N	101.6	101.6	48.42	130.2	12	4.4	15.9	52.8	172.2	12.7	17200	25100	4500	UG224NL
	F3-U2M40N	101.6	101.6	48.42	130.2	12	4.4	15.9	52.8	172.2	12.7	17200	25100	4500	UG2M40NL
	F3-U226N	108.0	104.78	51.59	136.5	12	2.8	15.9	54.4	180.2	13.9	17800	25220	4000	UG226NL
	F3-U227N	108.0	104.78	51.59	136.5	12	2.8	15.9	54.4	180.2	13.9	17800	25220	4000	UG227NL
40	F3-U228N	108.0	104.78	51.59	136.5	12	2.8	15.9	54.4	180.2	13.9	17800	25220	4000	UG228NL
	F3-U2M45N	108.0	104.78	51.59	136.5	12	2.8	15.9	54.4	180.2	13.9	17800	25220	4000	UG2M45NL
	F3-U231N	114.3	111.12	53.18	142.9	12	5.2	19.0	58.3	188.9	14.3	20200	27090	3600	UG231NL
45	F3-U2E32N	114.3	111.12	53.18	142.9	12	5.2	19.0	58.3	188.9	14.3	20200	27090	3600	UG2E32NL
	F3-U2M50N	114.3	111.12	53.18	142.9	12	5.2	19.0	58.3	188.9	14.3	20200	27090	3600	UG2M50NL
	F3-U232N	125.4	130.18	57.15	161.9	16	7.9	23.0	65.1	215.9	15.9	25400	33540	3200	UG232NL
50	F3-U235N	125.4	130.18	57.15	161.9	16	7.9	23.0	65.1	215.9	15.9	25400	33540	3200	UG235NL
	F3-U2M55N	125.4	130.18	57.15	161.9	16	7.9	23.0	65.1	215.9	15.9	25400	33540	3200	UG2M55NL
	F3-U236N	136.5	142.88	63.50	174.6	16	8.7	23.8	72.2	234.2	16.3	31300	40520	3000	UG236NL
55	F3-U238N	136.5	142.88	63.50	174.6	16	8.7	23.8	72.2	234.2	16.3	31300	40520	3000	UG238NL
	F3-U239N	136.5	142.88	63.50	174.6	16	8.7	23.8	72.2	234.2	16.3	31300	40520	3000	UG239NL
	F3-U2M60N	136.5	142.88	63.50	174.6	16	8.7	23.8	72.2	234.2	16.3	31300	40520	3000	UG2M60NL
60	F3-U240N	149.2	149.22	68.26	187.3	16	2.4	19.0	70.6	249.2	15.9	34900	44220	-	UG240NL
	F3-U243N	149.2	149.22	68.26	187.3	16	2.4	19.0	70.6	249.2	15.9	34900	44220	-	UG243NL
	F3-U2M65N	149.2	149.22	68.26	187.3	16	2.4	19.0	70.6	249.2	15.9	34900	44220	-	UG2M65NL
65	F3-U244N	161.9	152.40	73.02	196.8	20	2.4	19.0	75.4	260.4	17.5	42800	51600	-	UG244NL
	F3-U247N	161.9	152.40	73.02	196.8	20	2.4	19.0	75.4	260.4	17.5	42800	51600	-	UG247NL
	F3-U2E48N	161.9	152.40	73.02	196.8	20	2.4	19.0	75.4	260.4	17.5	42800	51600	-	UG2E48NL
	F3-U2M75N	161.9	152.40	73.02	196.8	20	2.4	19.0	75.4	260.4	17.5	42800	51600	-	UG2M75NL
75	F3-U255N	190.5	171.45	90.49	217.5	20	2.4	25.4	92.9	288.9	19.0	55400	64500	-	UG255NL
	F3-U2E56N	190.5	171.45	90.49	217.5	20	2.4	25.4	92.9	288.9	19.0	55400	64500	-	UG2E56NL
	F3-U2M85N	190.5	171.45	90.49	217.5	20	2.4	25.4	92.9	288.9	19.0	55400	64500	-	UG2M85NL

מידות המיסיב הפנימי בעמ' 2-23