




דגם מס' 3




דגם מס' 8

קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוחב הידוק	דגם מספר	קדח מקסימלי	
			B	W	T			[מ"מ]	[אינץ']
200	200SPC2-TL	2	60	46	7	TL2517	3	60	2.5
	200SPC3-TL	3	85	46	19.5	TL2517	3	60	2.5
	200SPC4-TL	4	110.5	51	30	TL3020	3	75	3
	200SPC5-TL	5	136	89	23.5	TL3535	3	90	3.5
	200SPC6-TL	6	161.5	89	36	TL3535	3	90	3.5
	200SPC8-TL	8	212.5	89	62	TL3535	3	90	3.5
212	212SPC2-TL	2	60	46	7	TL2517	3	60	2.5
	212SPC3-TL	3	85	51	17	TL3020	3	75	3
	212SPC4-TL	4	110.5	51	30	TL3020	3	75	3
	212SPC5-TL	5	136	89	23.5	TL3535	3	90	3.5
	212SPC6-TL	6	161.5	89	36	TL3535	3	90	3.5
	212SPC8-TL	8	212.5	89	62	TL3535	3	90	3.5
224	224SPC2-TL	2	60	46	7	TL2517	3	60	2.5
	224SPC3-TL	3	85	51	17	TL3020	3	75	3
	224SPC4-TL	4	110.5	89	11	TL3535	3	90	3.5
	224SPC5-TL	5	136	89	23.5	TL3535	3	90	3.5
	224SPC6-TL	6	161.5	89	36	TL3535	3	90	3.5
	224SPC8-TL	8	212.5	89	62	TL3535	3	90	3.5
236	236SPC2-TL	2	60	46	7	TL2517	3	60	2.5
	236SPC3-TL	3	85	51	17	TL3020	3	75	3
	236SPC4-TL	4	110.5	89	11	TL3535	3	90	3.5
	236SPC5-TL	5	136	89	23.5	TL3535	3	90	3.5
	236SPC6-TL	6	161.5	89	36	TL3535	3	90	3.5
	236SPC8-TL	8	212.5	89	62	TL3535	3	90	3.5
250	250SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	250SPC3-TL	3	85	51	17	TL3020	3	75	3
	250SPC4-TL	4	110.5	89	11	TL3535	3	90	3.5
	250SPC5-TL	5	136	89	23.5	TL3535	3	90	3.5
	250SPC6-TL	6	161.5	89	36	TL3535	3	90	3.5
	250SPC8-TL	8	212.5	89	62	TL3535	3	90	3.5
265	265SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	265SPC3-TL	3	85	64	10.5	TL3525	3	90	3.5
	265SPC4-TL	4	110.5	89	11	TL3535	3	90	3.5
	265SPC5-TL	5	136	89	23.5	TL3535	3	90	3.5
	265SPC6-TL	6	161.5	89	36	TL3535	3	90	3.5
	265SPC8-TL	8	212.5	89	62	TL3535	3	90	3.5
280	280SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	280SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	280SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	280SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	280SPC6-TL	6	161.5	89	36	TL3535	8	90	3.5
	280SPC8-TL	8	212.5	89	62	TL3535	8	90	3.5
300	300SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	300SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	300SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	300SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	300SPC6-TL	6	161.5	89	36	TL3535	8	90	3.5
	300SPC8-TL	8	212.5	102	55	TL4040	3	100	4

מתאים לרצועה XPC, SPC, C

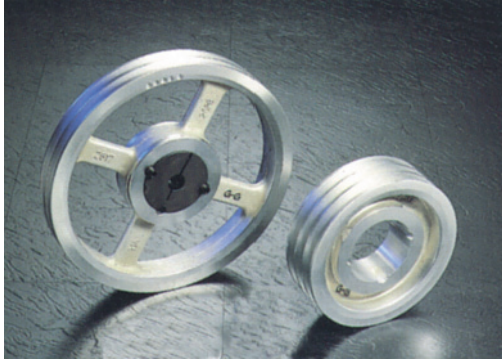


דגם מס' 4




דגם מס' 8

קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוכנית הידוק	דגם מספר	דחמקסימלי	
			B	W	T			[מ"מ]	[אינץ']
315	315SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	315SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	315SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	315SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	315SPC6-TL	6	161.5	89	36	TL3535	8	90	3.5
	315SPC8-TL	8	212.5	102	55	TL4040	8	100	4
335	335SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	335SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	335SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	335SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	335SPC6-TL	6	161.5	89	36	TL3535	8	90	3.5
	335SPC8-TL	8	212.5	102	55	TL4040	8	100	4
355	355SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	355SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	355SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	355SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	355SPC6-TL	6	161.5	89	36	TL3535	8	90	3.5
	355SPC8-TL	8	212.5	102	55	TL4040	8	100	4
375	375SPC2-TL	2	60	51	4.5	TL3020	8	75	3
	375SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	375SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	375SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	375SPC6-TL	6	161.5	102	30	TL4040	8	100	4
	375SPC8-TL	8	212.5	114.5	49	TL4545	8	115	4.5
400	400SPC2-TL	2	60	64	2	TL3525	4	90	3.5
	400SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	400SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	400SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	400SPC6-TL	6	161.5	102	30	TL4040	8	100	4
	400SPC8-TL	8	212.5	114.5	49	TL4545	8	115	4.5
425	425SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	425SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	425SPC5-TL	5	136	89	23.5	TL3535	8	90	3.5
	425SPC6-TL	6	161.5	102	30	TL4040	8	100	4
	425SPC8-TL	8	212.5	114.5	49	TL4545	8	115	4.5
450	450SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	450SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	450SPC5-TL	5	136	102	17	TL4040	8	100	4
	450SPC6-TL	6	161.5	114.5	23.5	TL4545	8	115	4.5
	450SPC8-TL	8	212.5	127	43	TL5050	8	125	5
475	475SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	475SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	475SPC5-TL	5	136	102	17	TL4040	8	100	4
	475SPC6-TL	6	161.5	114.5	23.5	TL4545	8	115	4.5
	475SPC8-TL	8	212.5	127	43	TL5050	8	125	5

מתאים לרצועה SPC, C, XPC



דגם מס' 8



דגם מס' 9

קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוחב הידוק	דגם מספר	קדח מקסימלי	
			B	W	T			[מ"מ]	[אינץ']
500	500SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	500SPC4-TL	4	110.5	89	11	TL3535	8	90	3.5
	500SPC5-TL	5	136	102	17	TL4040	8	100	4
	500SPC6-TL	6	161.5	114.5	23.5	TL4545	8	115	4.5
	500SPC8-TL	8	212.5	127	43	TL5050	8	125	5
530	530SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	530SPC4-TL	4	110.5	102	4	TL4040	8	100	3.5
	530SPC5-TL	5	136	114.5	11	TL4545	8	115	4.5
	530SPC6-TL	6	161.5	127	17	TL5050	8	125	5
	530SPC8-TL	8	212.5	127	43	TL5050	8	125	5
560	560SPC3-TL	3	85	64	10.5	TL3525	8	90	3.5
	560SPC4-TL	4	110.5	102	4	TL4040	8	100	3.5
	560SPC5-TL	5	136	114.5	11	TL4545	8	115	4.5
	560SPC6-TL	6	161.5	127	17	TL5050	8	125	5
	560SPC8-TL	8	212.5	127	43	TL5050	8	125	5
630	630SPC3-TL	3	85	102	8.5	TL4040	9	100	4
	630SPC4-TL	4	110.5	114.5	2	TL4545	9	115	4.5
	630SPC5-TL	5	136	127	4.5	TL5050	8	125	5
	630SPC6-TL	6	161.5	127	17	TL5050	8	125	5
	630SPC8-TL	8	212.5	127	43	TL5050	8	125	5

מתאים לרצועה XPC, SPC, C  
במלאי גלגלים עד קוטר 1000 מ"מ, עד 10 חריצים  
במלאי גלגלים לרצועה 8V