




כיוון סיבוב הטבעת החיצונית במבט מכיוון F

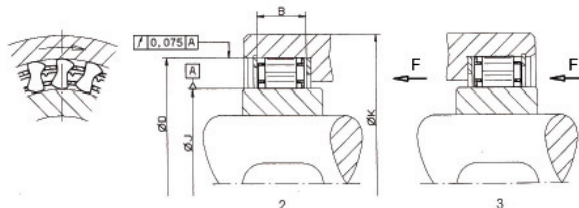

מק"ט	מומנט מקס.	J +0.008 -0.005	D ±0.013	B +0.008 -0.005	K min	כיוון סיבוב (לפי התרשים)
	(Nm)	[מ"מ]	[מ"מ]	[מ"מ]	[מ"מ]	
BS-BWX133590A	63	22.225	38.887	10.0	44.0	2
BS-BWX13143A	120	27.767	44.425	13.5	51.0	2
BS-BWX133392A	280	38.092	54.750	16.0	71.0	3
BS-BWX1310145A	180	41.275	57.937	13.5	74.2	2
BS-BWX132909A	360	44.450	61.112	16.0	78.5	2
BS-BWX133339	310	49.721	66.383	13.5	85.0	2
BS-BWX1310003	310	49.721	66.383	13.5	85.0	2
BS-BWX137222	570	49.721	66.383	19.0	85.0	2
BS-BWX1310172	540	54.765	71.427	16.0	91.7	2
BS-BWX1310226	520	54.765	71.427	16.0	91.7	2
BS-BWX133780	540	54.765	71.427	16.0	91.7	2
BS-BWX136709	770	54.765	71.427	21.0	91.7	2
BS-BWX1310147	1000	54.765	71.427	25.4	91.7	2
BS-BWX136324	600	57.760	74.427	19.0	95.0	3
BS-BWX1310080	670	72.217	88.882	13.5	115.0	2
BS-BWX13168	1300	72.217	88.882	21.0	115.0	3
BS-BWX134012	1300	72.217	88.882	21.0	115.0	3
BS-BWX133687	580	79.698	96.363	13.5	124.0	2
BS-BWX137322	2000	79.698	96.363	25.4	124.0	2
BS-BWX134008A	2600	85.776	104.776	25.4	134.7	2
BS-BWX13261A	1600	103.231	119.893	16.0	154.0	3
BS-BWX13236	1700	117.391	136.391	16.0	175.3	3
BS-BWX133403B	4900	123.881	142.880	25.4	188.0	2