
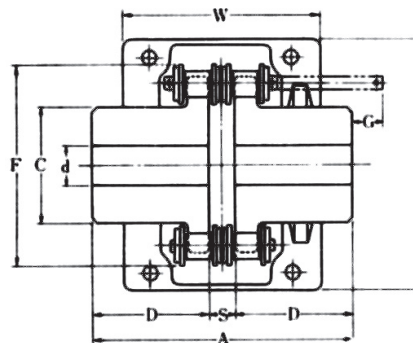


Roller Chain Coupling

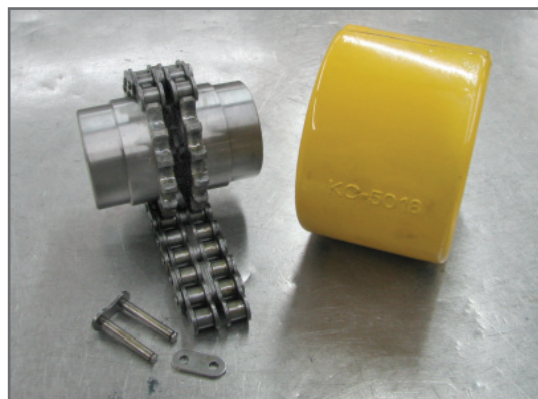

מק"ט	מידות [מ"מ]						קוטר קדח d		משקל כולל מכסה [ק"ג]	מכסה המקשר		
	A	D	S	C	F	Min	Max	f		w	משקל [ק"ג]	
CR-4012	79.4	36	7.4	36	62	14	22	1.03	77	72	0.3	
CR-4016	87.4	40	7.4	51.5	77	16	32	1.85	92	72	0.35	
CR-5016	99.7	45	9.7	64	96	18	40	3.25	110	87	0.5	
CR-5018	99.7	45	9.7	73.5	106	18	45	4.2	122	85	0.6	
CR-6018	123.5	56	11.5	89.5	127	22	56	7.75	147	105	1.2	
CR-6020	123.5	56	11.5	102.5	139	24	60	9.58	158	105	1.2	
CR-6022	123.5	56	11.5	116	151	28	71	11.6	168	117	1.2	
CR-8018	141.2	63	15.2	115	169	32	80	15.1	190	129	1.9	
CR-8020	141.2	65	15.2	125	185	36	90	18.7	210	137	2.5	
CR-10020	178.8	80	18.8	162	233	45	110	36.5	281	153	4.1	
CR-12018	202.7	90	22.7	173	256	50	125	48.4	307	181	5.2	
CR-12022	222.7	100	22.7	213	304	56	140	75.8	357	181	6.7	

מומלץ להשתמש במגינים בכל עבודה עם מקשרים, ראה עמ' 6-16

הספק מועבר ב- kW

מק"ט	מהירות [סל"ד]															
	25	50	100	200	300	400	600	800	1000	1200	1500	2000	2100	3000	3600	4000
CR-4012	0.7	1.3	1.9	2.8	3.5	4.2	5.2	6.2	7.0	7.9	9.2	12	13	16	18	19
CR-4016	1.2	2.2	3.2	4.8	6.0	7.0	9.0	11	12	14	16	20	22	26	30	32
CR-5016	2.1	4.2	6.0	9	11	13	17	20	23	26	30	37	42	50	56	-
CR-5018	2.4	4.8	7.0	11	13	16	20	23	26	30	34	44	50	58	-	-
CR-6018	4.3	8.5	12	19	23	27	34	40	46	52	60	74	85	100	-	-
CR-6020	5.5	11	16	24	29	34	44	50	57	65	76	95	110	130	-	-
CR-6022	7.0	14	20	30	38	44	55	64	72	82	98	120	110	-	-	-
CR-8018	10.5	20	30	41	56	65	82	98	110	125	150	180	210	-	-	-
CR-8020	12	24	35	52	65	76	96	115	130	145	170	210	240	-	-	-
CR-10018	16	30	45	66	81	98	125	145	165	190	220	270	-	-	-	-
CR-10020	23	44	65	96	120	140	180	210	240	270	320	-	-	-	-	-
CR-12018	33	64	96	140	175	210	260	300	340	390	-	-	-	-	-	-
CR-12022	48	95	140	200	250	300	380	450	500	560	-	-	-	-	-	-

טוב לעבודה ללא מכסה וגירוז

חייב גירוז ועבודה עם מכסה

תחום אסור לעבודה