




דגם מס' 1



דגם מס' 2




דגם מס' 3



דגם מס' 12


קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוכן הידוק	דגם מספר	קדח מקסימלי	
			B	W	T			[מ"מ]	[אינץ']
63	63SPA1-TL	1	20	22	2	TL1008	1	25	1
	63SPA2-TL	2	35	22	13	TL1108	12	25	1
67	67SPA1-TL	1	20	22	2	TL1008	1	25	1
	67SPA2-TL	2	35	22	13	TL1008	12	25	1
71	71SPA1-TL	1	20	22	2	TL1108	1	28	1.12
	71SPA2-TL	2	35	22	13	TL1108	12	28	1.12
	71SPA3-TL	3	50	22	28	TL1108	12	28	1.12
75	75SPA1-TL	1	20	22	2	TL1108	1	28	1.12
	75SPA2-TL	2	35	22	13	TL1108	12	28	1.12
	75SPA3-TL	3	50	22	28	TL1108	12	28	1.12
80	80SPA1-TL	1	20	26	2	TL1210	1	32	1.25
	80SPA2-TL	2	35	26	13	TL1210	12	32	1.25
	80SPA3-TL	3	50	26	28	TL1210	12	32	1.25
85	85SPA1-TL	1	20	26	6	TL1210	1	32	1.25
	85SPA2-TL	2	35	26	9	TL1210	12	32	1.25
	85SPA3-TL	3	50	26	24	TL1210	12	32	1.25
90	90SPA1-TL	1	20	26	6	TL1210	1	32	1.25
	90SPA2-TL	2	35	26	9	TL1610	12	42	1.63
	90SPA3-TL	3	50	26	24	TL1610	12	42	1.63
	90SPA4-TL	4	65	38	27	TL1615	12	42	1.63
95	95SPA1-TL	1	20	26	6	TL1210	1	32	1.25
	95SPA2-TL	2	35	26	9	TL1610	12	42	1.63
	95SPA3-TL	3	50	26	24	TL1610	12	42	1.63
	95SPA4-TL	4	65	38	27	TL1615	12	42	1.63
100	100SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	100SPA2-TL	2	35	26	9	TL1610	12	42	1.63
	100SPA3-TL	3	50	26	24	TL1610	12	42	1.63
	100SPA4-TL	4	65	38	27	TL1615	12	42	1.63
106	106SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	106SPA2-TL	2	35	26	9	TL1610	12	42	1.63
	106SPA3-TL	3	50	26	24	TL1610	12	42	1.63
	106SPA4-TL	4	65	32	33	TL2012	12	50	2
112	112SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	112SPA2-TL	2	35	26	9	TL1610	12	42	1.63
	112SPA3-TL	3	50	32	18	TL2012	12	50	2
	112SPA4-TL	4	65	32	33	TL2012	12	50	2
118	118SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	118SPA2-TL	2	35	26	9	TL1610	12	42	1.63
	118SPA3-TL	3	50	32	18	TL2012	2	50	2
	118SPA4-TL	4	65	32	33	TL2012	2	50	2
125	125SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	125SPA2-TL	2	35	26	9	TL1610	2	42	1.63
	125SPA3-TL	3	50	32	18	TL2012	2	50	2
	125SPA4-TL	4	65	32	33	TL2012	2	50	2
	125SPA5-TL	5	80	32	24	TL2012	3	50	2

מתאים לרצועה XPA, SPA, A

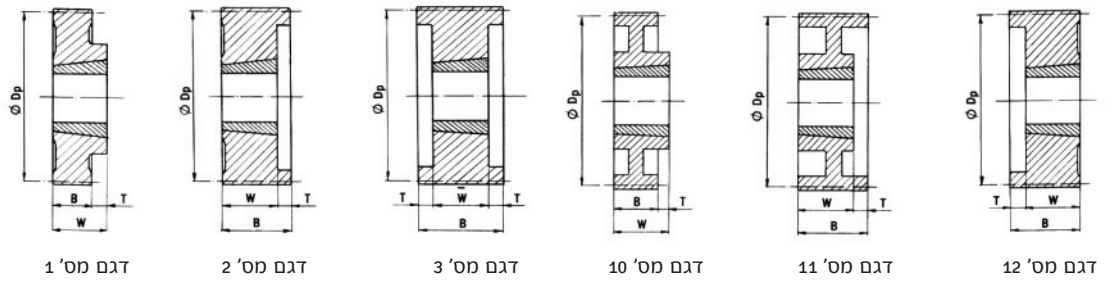



קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוכנית היזוק	דגם מספר	קדח מקסימלי	
			B	W	T			[מ"מ]	[אינץ']
132	132SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	132SPA2-TL	2	35	32	3	TL2012	2	50	2
	132SPA3-TL	3	50	32	18	TL2012	2	50	2
	132SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	132SPA5-TL	5	80	46	17	TL2517	3	60	2.5
140	140SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	140SPA2-TL	2	35	32	3	TL2012	2	50	2
	140SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	140SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	140SPA5-TL	5	80	46	17	TL2517	3	60	2.5
145	145SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	145SPA2-TL	2	35	32	3	TL2012	2	50	2
	145SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	145SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	145SPA5-TL	5	80	46	17	TL2517	3	60	2.5
150	150SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	150SPA2-TL	2	35	32	3	TL2012	2	50	2
	150SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	150SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	150SPA5-TL	5	80	46	17	TL2517	3	60	2.5
155	155SPA1-TL	1	20	26	6	TL1610	1	42	1.63
	155SPA2-TL	2	35	32	3	TL2012	2	50	2
	155SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	155SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	155SPA5-TL	5	80	46	17	TL2517	3	60	2.5
160	160SPA1-TL	1	20	26	6	TL1610	10	42	1.63
	160SPA2-TL	2	35	32	3	TL2012	2	50	2
	160SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	160SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	160SPA5-TL	5	80	46	17	TL2517	3	60	2.5
170	170SPA1-TL	1	20	26	6	TL1610	10	42	1.63
	170SPA2-TL	2	35	32	3	TL2012	11	50	2
	170SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	170SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	170SPA5-TL	5	80	46	17	TL2517	3	60	2.5
175	175SPA1-TL	1	20	26	6	TL1610	10	42	1.63
	175SPA2-TL	2	35	32	3	TL2012	11	50	2
	175SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	175SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	175SPA5-TL	5	80	46	17	TL2517	3	60	2.5
180	180SPA1-TL	1	20	26	6	TL1610	10	42	1.63
	180SPA2-TL	2	35	32	3	TL2012	11	50	2
	180SPA3-TL	3	50	46	4	TL2517	2	60	2.5
	180SPA4-TL	4	65	46	19	TL2517	2	60	2.5
	180SPA5-TL	5	80	51	14.5	TL3020	3	75	3

תמאים לרצועה XPA, SPA, A

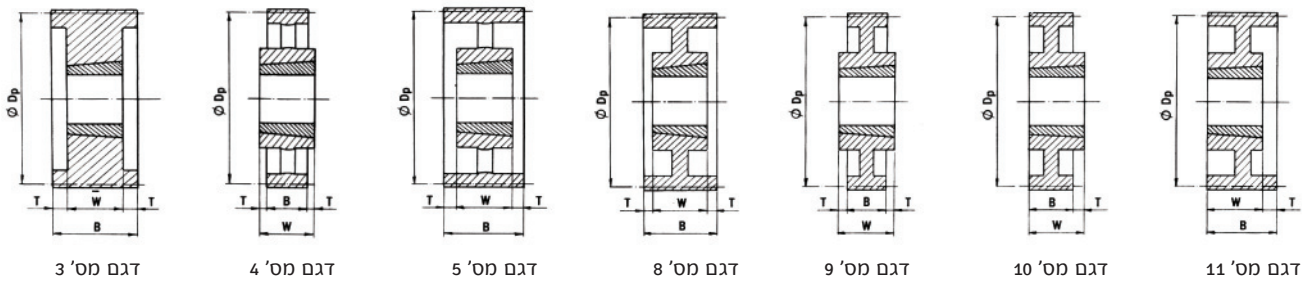


קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוחב הידוק	דגם מספר	קצה מקסימלי	
			B	W	T			[מ"מ]	[אינץ']
190	190SPA1-TL	1	20	26	6	TL1610	10	42	1.63
	190SPA2-TL	2	35	32	3	TL2012	9	50	2
	190SPA3-TL	3	50	46	4	TL2517	11	60	2.5
	190SPA4-TL	4	65	46	19	TL2517	11	60	2.5
	190SPA5-TL	5	80	51	14.5	TL3020	3	75	3
200	200SPA1-TL	1	20	32	6	TL2012	9	50	2
	200SPA2-TL	2	35	46	5.5	TL2517	9	60	2.5
	200SPA3-TL	3	50	46	4	TL2517	11	60	2.5
	200SPA4-TL	4	65	51	14	TL3020	11	75	3
	200SPA5-TL	5	80	51	14.5	TL3020	3	75	3
212	212SPA1-TL	1	20	32	6	TL2012	9	50	2
	212SPA2-TL	2	35	46	5.5	TL2517	9	60	2.5
	212SPA3-TL	3	50	46	4	TL2517	11	60	2.5
	212SPA4-TL	4	65	51	14	TL3020	11	75	3
	212SPA5-TL	5	80	51	14.5	TL3020	3	75	3
224	224SPA1-TL	1	20	32	6	TL2012	9	50	2
	224SPA2-TL	2	35	46	5.5	TL2517	9	60	2.5
	224SPA3-TL	3	50	46	4	TL2517	11	60	2.5
	224SPA4-TL	4	65	51	14	TL3020	11	60	2.5
	224SPA5-TL	5	80	51	14.5	TL3020	8	75	3
236	236SPA1-TL	1	20	32	6	TL2012	9	50	2
	236SPA2-TL	2	35	46	5.5	TL2517	9	60	2.5
	236SPA3-TL	3	50	46	4	TL2517	11	60	2.5
	236SPA4-TL	4	65	51	7	TL3020	8	75	3
	236SPA5-TL	5	80	51	14.5	TL3020	8	75	3
250	250SPA1-TL	1	20	32	6	TL2012	4	50	2
	250SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	250SPA3-TL	3	50	46	2	TL2517	5	60	2.5
	250SPA4-TL	4	65	51	7	TL3020	8	75	3
	250SPA5-TL	5	80	51	14.5	TL3020	8	75	3
265	265SPA1-TL	1	20	32	6	TL2012	4	50	2
	265SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	265SPA3-TL	3	50	46	2	TL2517	5	60	2.5
	265SPA4-TL	4	65	51	7	TL3020	8	75	3
	265SPA5-TL	5	80	51	14.5	TL3020	8	75	3
280	280SPA1-TL	1	20	32	6	TL2012	4	50	2
	280SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	280SPA3-TL	3	50	46	2	TL2517	5	60	2.5
	280SPA4-TL	4	65	51	7	TL3020	8	75	3
	280SPA5-TL	5	80	64	8	TL3525	8	90	3
300	300SPA1-TL	1	20	32	6	TL2012	4	50	2
	300SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	300SPA3-TL	3	50	51	0.5	TL2517	4	75	3
	300SPA4-TL	4	65	51	7	TL3020	8	75	3
	300SPA5-TL	5	80	64	8	TL3525	8	90	3.5


תאים לרצועה XPA, SPA, A

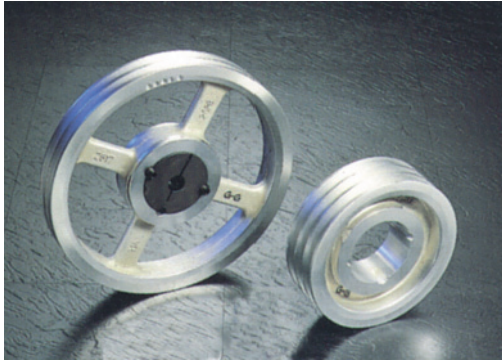

דגם מס' 4



דגם מס' 5



דגם מס' 8

קוטר עבודה	מק"ט	מספר רצועות	מידות [מ"מ]			תוחב הידוק	דגם מספר	קדח מקסימלי	
			B	W	T			[מ"מ]	[אינץ']
315	315SPA1-TL	1	20	32	6	TL2012	4	50	2
	315SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	315SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	315SPA4-TL	4	65	51	7	TL3020	8	75	3
	315SPA5-TL	5	80	64	8	TL3525	8	90	3.5
325	325SPA1-TL	1	20	32	6	TL2012	4	50	2
	325SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	325SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	325SPA4-TL	4	65	51	7	TL3020	8	75	3
	325SPA5-TL	5	80	64	8	TL3525	8	90	3.5
340	340SPA1-TL	1	20	32	6	TL2012	4	50	2
	340SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	340SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	340SPA4-TL	4	65	51	7	TL3020	8	75	3
	340SPA5-TL	5	80	64	8	TL3525	8	90	3.5
355	355SPA1-TL	1	20	32	6	TL2012	4	50	2
	355SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	355SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	355SPA4-TL	4	65	51	7	TL3020	5	75	3
	355SPA5-TL	5	80	64	8	TL3525	5	90	3.5
375	375SPA1-TL	1	20	32	6	TL2012	4	50	2
	375SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	375SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	375SPA4-TL	4	65	51	7	TL3020	5	75	3
	375SPA5-TL	5	80	64	8	TL3525	5	90	3.5
400	400SPA1-TL	1	20	32	6	TL2012	4	50	2
	400SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	400SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	400SPA4-TL	4	65	51	7	TL3020	5	75	3
	400SPA5-TL	5	80	64	8	TL3525	5	90	3.5
425	425SPA1-TL	1	20	46	13	TL2517	4	60	2.5
	425SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	425SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	425SPA4-TL	4	65	51	7	TL3020	5	75	3
	425SPA5-TL	5	80	64	8	TL3525	5	90	3.5
450	450SPA1-TL	1	20	32	12	TL2012	4	60	2.5
	450SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	450SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	450SPA4-TL	4	65	51	7	TL3020	5	75	3
	450SPA5-TL	5	80	64	8	TL3525	5	90	3.5
500	500SPA2-TL	2	35	46	5.5	TL2517	4	60	2.5
	500SPA3-TL	3	50	51	0.5	TL3020	4	75	3
	500SPA4-TL	4	65	51	7	TL3020	5	75	3
	500SPA5-TL	5	80	64	8	TL3525	5	90	3.5

ניתן לקבל מהמלאי עד קוטר 630 מתאים לרצועה XPA, SPA, A